


0701-0096

Bottom Mount Enclosure, 5 slot, 3U Cards Vertical CompactPCI Enclosure

- » **Bottom mount**
- » **IEEE 1101.10/11 compliance**
- » **4U / 44 HP system (incl. 1U fan tray)**
- » **CompactPCI® PlusIO system slot right**
- » **4 CompactPCI® peripheral slots to the left**
- » **V-IO voltage 3.3V / 5V selectable by jumper**
- » **Dual 6 HP power supply slot with H.15 connector**

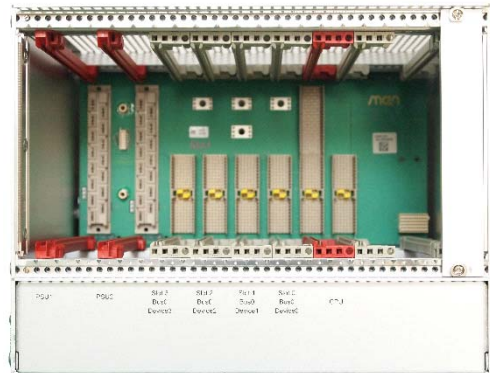

This ultra-small compactPCI enclosure is a basic system that allows configuration with both CompactPCI® PlusIO system and CompactPCI® cards. The unit comprises an 1U fan tray with a low-noise fan at the bottom.


The CompactPCI® PlusIO system slot is the second slot from the right. Either a standard CompactPCI® 2.0 or a PICMG 2.30 CompactPCI® PlusIO CPU board can be used in this slot.

This system slot is designed for use with the MEN system-slot SBCs.

The four slots on the CompactPCI® bus can be used to install additional I/O functions.

This system offers two 6 HP spaces on the left for pluggable power supplies with an H.15 connector.

The system meets EMC requirements, making it a perfect choice for embedded applications in rough environments.

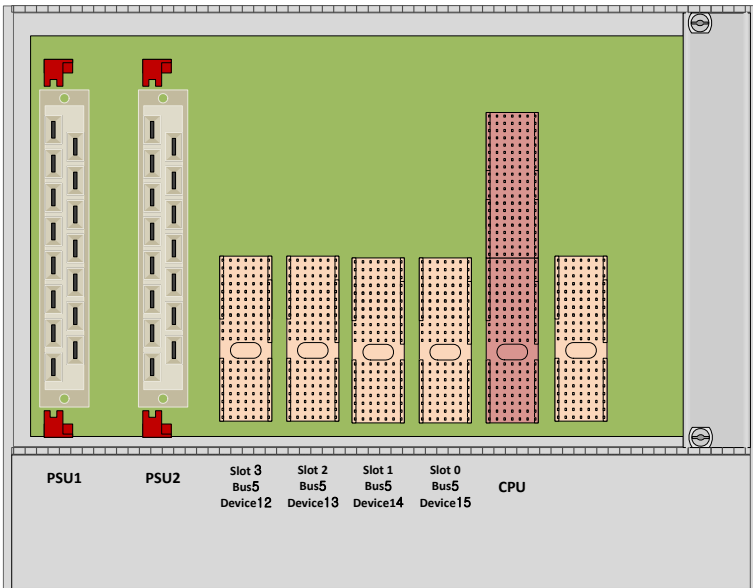

General System Characteristics

- Compliance with IEC 60297-3, IEEE 1101.10
- 5 slots for 3U Eurocard boards
- 2 slots for 3U 6HP PSU
- Additional space right of the system slot for a side card connected to the CPU board

Mechanical Specifications

- 19" rack-mount standard and bottom mounting possible
- 3U card vertical and 1U fan tray
- Dimensions: WxHxD max. 232.60 x 177.00 x 241.25 mm
- Weight: 3.3kg

Backplane Structure

- 1 x CompactPCI® PlusIO system slot
- 4 x CompactPCI® peripheral slots
- 2 x H.15 Power Supply slots
- V-IO voltage 3.3V / 5V DC selectable by Jumper

Power Supply

- PSU not included
- 2 x 3U 6HP slot with H.15 power connector
- Power input at the back at the bottom of the system
- 2 x Power Supply Connectors Phoenix COMBICON 3 pin (Phoenix Contact "DFK-MSTB 2.5/ 3-GF-5.08")

Mounting

- Front or Bottom mounting possible

Environmental Specifications

- Temperature range (operation): 0...+50°C
- Temperature range (storage): -20...+70°C
- Relative humidity (operation): max. 90% non-condensing
- Relative humidity (storage): max. 90% non-condensing

EMC

- Radiated Emission: EN 55022:2010 EN 55024:2010
- Conducted Emission: EN 55024:2010 / EN 61000-4-2 level 4 (15kV Air + 8kV conducted)

Safety

- PCB manufactured with a flammability rating of 94V-0 by UL recognized manufacturers

Electrical Safety

- EN 60950-1:2006
- EN 62368-1:2014

Germany

MEN Mikro Elektronik GmbH

Neuwieder Straße 3-7
90411 Nuremberg
Phone +49-911-99 33 5-0

sales@men.de
www.men.de

France

MEN Mikro Elektronik SAS

18, rue René Cassin
ZA de la Châtelaine
74240 Gaillard
Phone +33-450-955-312

sales@men-france.fr
www.men-france.fr

USA

MEN Micro Inc.

860 Penllyn Blue Bell Pike
Blue Bell, PA 19422
Phone 215-542-9575

sales@menmicro.com
www.menmicro.com

China

MEN Mikro Elektronik (Shanghai) Co., Ltd.

Room 808-809, Jiaxing Mansion, No. 877 Dongfang Road
200122 Shanghai
Phone +86-21-5058-0961

sales@men-china.cn
www.men-china.cn

Up-to-date information, documentation and ordering information:

www.men.de/products

The date of issue stated in this data sheet refers to the Technical Data only. Changes in ordering information given herein do not affect the date of issue. All brand or product names are trademarks or registered trademarks of their respective holders.

MEN is not responsible for the results of any actions taken on the basis of information in the publication, nor for any error in or omission from the publication. MEN expressly disclaims all and any liability and responsibility to any person, whether a reader of the publication or not, in respect of anything, and of the consequences of anything, done or omitted to be done by any such person in reliance, whether wholly or partially, on the whole or any part of the contents of the publication. The correct function of MEN products in mission-critical and life-critical applications is limited to the environmental specification given for each product in the technical user manual. The correct function of MEN products under extended environmental conditions is limited to the individual requirement specification and subsequent validation documents for each product for the applicable use case and has to be agreed upon in writing by MEN and the customer. Should the customer purchase or use MEN products for any unintended or unauthorized application, the customer shall indemnify and hold MEN and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim or personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that MEN was negligent regarding the design or manufacture of the part. In no case is MEN liable for the correct function of the technical installation where MEN products are a part of.

© 2016 MEN Holding